

106" DWCM

The 106" DWCM can be used to cut any target up to 106" OD including pipelines, vertical or inclines pipes, reinforced concrete, composite cables, concrete legs and other structures.


The 106" DWCM is powered via surface umbilical and positioned by WROV or divers.

Additional buoyancy can be added and 'trimmed' to suit client requirements with a depth rating of up to 3000m. It is equipped with a crash frame to avoid damage to the main structure of the DWCM during deployment and operation. The DWCM can be fitted with ROV handles to facilitate ease of handling by WROV.

Contact CUT if you have a requirement for this tool.

106" DWCM

Performance	Up to 106" OD tubular cutting capacity	
Power Requirement	Hydraulic Power 160 l/min @ 200 bar	
Weight (kg)	Air	Water
	1565(+/-50)	50(+/-5)
Dimensions (mm) – any clamp position		
Length	6180	
Width	4250	
Height	1170	

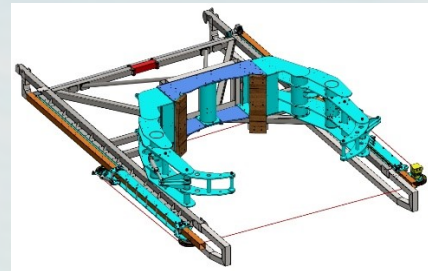

DATASHEET