

120" DWCM

The 120" DWCM is an extremely versatile cutting tool. Its modular form allows additional centre sections and spacers to be fitted increasing its overall cutting capacity from 120" Max OD to 180" max OD.

Additionally the 120" DWCM can perform step and castellated cuts to increase the stability of a platform after all legs have been cut.

The 120" is powered via surface umbilical and positioned using WROV or divers.


Additional buoyancy can be added and 'trimmed' to suit client requirements with a depth rating of up to 3000m. The structure of the DWCM acts as a crash frame to avoid damage to the main cutting and feeding assemblies of the DWCM during deployment and operation. The frame is fitted with ROV handles to facilitate ease of handling by WROV.

The 120" DWCM can be used to cut any target up to 120" OD, 165"OD or 180"OD including pipelines, vertical or inclines pipes, reinforced concrete, composite cables, concrete legs and other structures.

Contact CUT if you have a requirement for this tool.

85-120" DWCM

Performance	85"-121" OD tubular cutting capacity	
Power Requirement	Hydraulic Power 150 l/min @ 200 bar	
Weight (kg)	Air	Water
	3800(+/-100)	(with buoyancy) 150(+/-5)
Dimensions (mm) – any clamp position		
Length	5270	
Width	5210(+/-80)	
Height	1670	

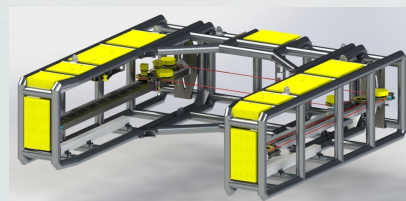


DATASHEET


120" DWCM

60-84" DWCM

Performance	60"-84" OD tubular cutting capacity	
Power Requirement	Hydraulic Power 150 l/min @ 200 bar	
Weight (kg)	Air	Water (with buoyancy)
	3700(+/-100)	150(+/-5)
Dimensions (mm) – any clamp position		
Length	5270	
Width	4290(+/-80)	
Height	1670	

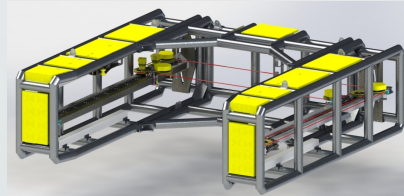

120" DWCM Extended

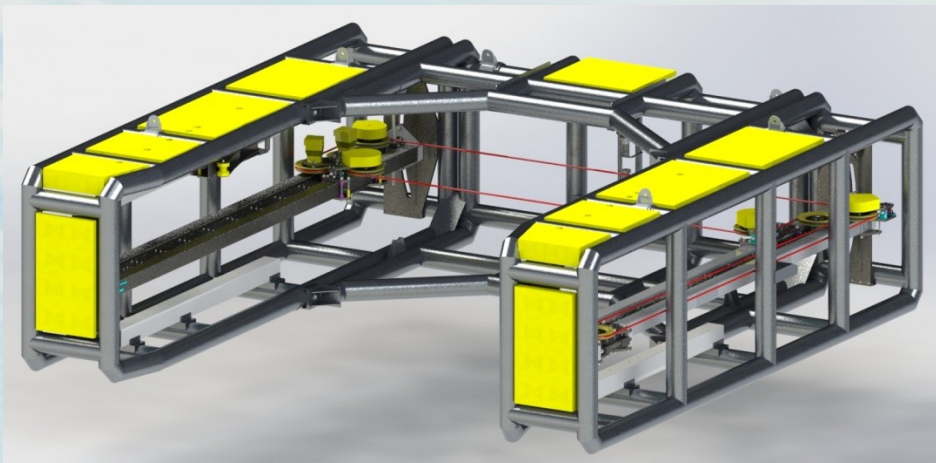

Performance	Up to 161" OD tubular cutting capacity	
Power Requirement	Hydraulic Power 150 l/min @ 200 bar	
Weight (kg)	Air	Water (with buoyancy)
	4100(+/-100)	200(+/-50)
Dimensions (mm) – any clamp position		
Length	6018	
Width	6295(+/-80)	
Height	1670	

DATASHEET