


The 50" DWCM is an extremely versatile cutting tool. It can be powered via surface umbilical or interfaced directly to a WROV and positioned using WROV or divers.

Additional buoyancy can be added and 'trimmed' to suit client requirements with a depth rating of up to 3000m. It is equipped with a crash frame to avoid damage to the main structure of the DWCM during deployment and operation. The crash frame is fitted with ROV handles to facilitate ease of handling by WROV.

The 50" DWCM can be used to cut any target up to 50" OD including pipelines, vertical or inclines pipes, reinforced concrete, composite cables, concrete legs and other structures.

Contact CUT if you have a requirement for this tool.

<b>50" DWCM</b>		
<b>Performance</b>	Up to 50" OD tubular cutting capacity	
<b>Power Requirement</b>	Hydraulic Power 90 l/min @ 200 bar	
<b>Weight (kg)</b>	Air	Water
	900 (+/-50) (with buoyancy)	25 (+/-5) (with buoyancy)
<b>Dimensions (mm) – any clamp position</b>		
<b>Length</b>	3370	
<b>Width</b>	2120	
<b>Height</b>	805	

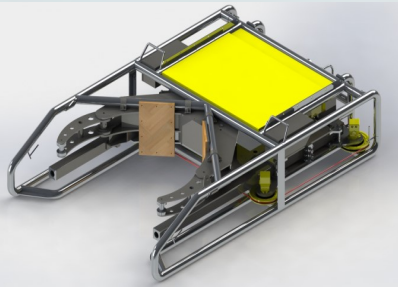

# DATASHEET