


The 74" DWCM is an extremely versatile cutting tool. It comes in 2 formats, the 74" standard and the 74" extended. The 74" Extended has a longer cutting stroke to allow cutting of longer targets such as piles c/w launch runners. Specially designed saddles are fitted to the DWCM to facilitate clamping of such structures.

The 74" DWCM can be powered via surface umbilical or interfaced directly to a WROV and positioned using WROV or divers.

Additional buoyancy can be added and 'trimmed' to suit client requirements with a depth rating of up to 3000m. It is equipped with a crash frame to avoid damage to the main structure of the DWCM during deployment and operation. The crash frame is fitted with ROV handles to facilitate ease of handling by WROV.

The 74" DWCM can be used to cut any target up to 74" OD including pipelines, vertical or inclines pipes, reinforced concrete, composite cables, concrete legs, flexible risers, launch runners and other structures.

<b>74" DWCM</b>		
<b>Performance</b>	Up to 74.5" OD tubular cutting capacity	
<b>Power Requirement</b>	Hydraulic Power 110 l/min @ 200 bar	
<b>Weight (kg)</b>	Air	Water (with buoyancy)
	1400(+/-50)	25(+/-5)
<b>Dimensions (mm) – any clamp position</b>		
<b>Length</b>	4460	
<b>Width</b>	3045	
<b>Height</b>	1000	

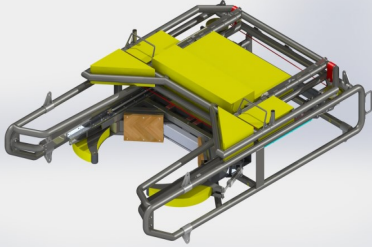

# DATASHEET